

Highlights

DRIVE-15A

Order No. 1000195



Professional active DSP speaker system with 2-channel amplifier, 360 W

- Compact 15/2 full range system with cabinet made of birch plywood
- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
 - FLAT (linear adjustment)
 - MUSIC (slightly raised bass and treble)
 - LOW CUT (with high-pass filter for application with an additional subwoofer)
- 38 cm (15") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- M8 threaded inserts, stand sleeve

Model	DRIVE-15A
Total output power	750 W
Power rating (RMS)	DSP-controlled 360 W (300 + 60) bass: 300 W treble: 60 W
Frequency range	40-20,000 Hz
Input signal	790 mV/40 kΩ (line, bal.)
SPL	98 dB/W/m
Beam angle	H: 90°/V: 60°, horn can be turned
Power supply	~ 230 V/50 Hz/550 VA
Dimensions	415 x 695 x 455 mm
Weight	22.04 kg
Inputs	1 x comb. XLR/6.3 mm: line 1 x XLR: line

- Volume control
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out
- Power and clip indicator



DRIVE-12A

Order No. 1000194




Professional active DSP speaker system with 2-channel amplifier, 350 W

- Compact 12/2 full range system with cabinet made of birch plywood
- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
 - FLAT (linear adjustment)
 - MUSIC (slightly raised bass and treble)
 - LOW CUT (with high-pass filter for application with an additional subwoofer)
- M8 threaded inserts, stand sleeve

Model	DRIVE-12A
Total output power	700 W
Power rating (RMS)	DSP-controlled 350 W (290 + 60) bass: 290 W treble: 60 W
Frequency range	45-20,000 Hz
Input signal	790 mV/40 kΩ (line, bal.)
SPL	98 dB/W/m
Beam angle	H: 90°/V: 60°, horn can be turned
Power supply	~ 230 V/50 Hz/510 VA
Dimensions	360 x 620 x 380 mm
Weight	17.04 kg

- 30 cm (12") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out

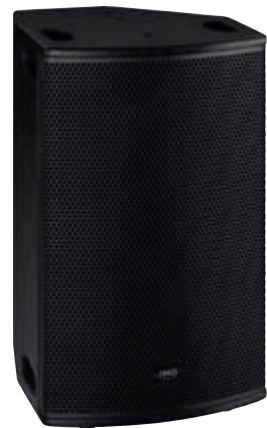

DRIVE-10A

Order No. 1000193




Professional active DSP speaker system with 2-channel amplifier, 200 W

- Compact 10/2 full range system with cabinet made of birch plywood
- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
 - FLAT (linear adjustment)
 - MUSIC (slightly raised bass and treble)
 - LOW CUT (with high-pass filter for application with an additional subwoofer)
- M8 threaded inserts, stand sleeve

Model	DRIVE-10A
Total output power	400 W
Power rating (RMS)	DSP-controlled 200 W (140 + 60) bass: 140 W treble: 60 W
Frequency range	55-20,000 Hz
Input signal	790 mV/40 kΩ (line, bal.)
SPL	98 dB/W/m
Beam angle	H: 90°/V: 60°, horn can be turned
Power supply	~ 230 V/50 Hz/350 VA
Dimensions	320 x 530 x 350 mm
Weight	12.18 kg

- 25 cm (10") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out

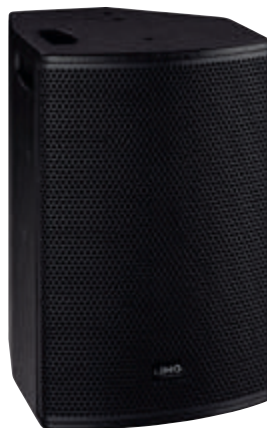

DRIVE-08A

Order No. 1000192



Professional active DSP speaker system with 2-channel amplifier, 200 W

- Compact 8/2 full range system with cabinet made of birch plywood
- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
 - FLAT (linear adjustment)
 - MUSIC (slightly raised bass and treble)
 - LOW CUT (with high-pass filter for application with an additional subwoofer)
- M8 threaded inserts, stand sleeve

Model	DRIVE-08A
Total output power	400 W
Power rating (RMS)	DSP-controlled 200 W (140 + 60) bass: 140 W treble: 60 W
Frequency range	60-20,000 Hz
Input signal	790 mV/40 kΩ (line, bal.)
SPL	98 dB/W/m
Beam angle	H: 90°/V: 60°, horn can be turned
Power supply	~ 230 V/50 Hz/250 VA
Dimensions	270 x 460 x 290 mm
Weight	9.4 kg

- 20 cm (8") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out

