

IT-10M


Order No. 0160470



Flush-mount horn speaker (music horn) with full range speaker

- For wall mounting and ceiling installation
- 100 V transmission technology with 3 power taps
- After installation weatherproof and IP54 certified
- 5 cm (2.5") full range speaker with horn front attachment
- Suitable for general indoor and outdoor applications wherever a high sound pressure level and an excellent sound are required
- ABS plastic housing
- Mounting flange with foam rubber sealing

Model	IT-10M
Power rating (RMS)	10/5/2.5 W
Frequency range	200-15,000 Hz
SPL	98 dB/W/m
Beam angle	H: 100°/V: 100°
Dimensions	120 x 120 x 120 mm mounting cutout: Ø 101 mm
Weight	0.75 kg

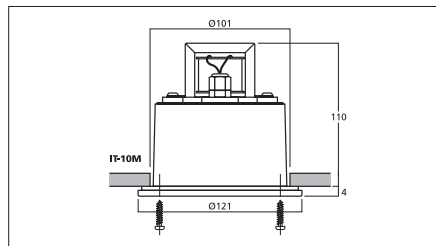

NR-10M


Order No. 0160480



Flush-mount horn speaker (music horn) with full range speaker, 4 Ω

- For wall mounting and ceiling installation
- After installation weatherproof and IP54 certified
- 4 Ω speaker system
- 5 cm (2.5") full range speaker with horn front attachment
- Suitable for general indoor and outdoor applications wherever a high sound pressure level and an excellent sound are required
- ABS plastic housing
- Mounting flange with foam rubber sealing

Model	NR-10M
Total power rating	20 W
Power rating (RMS)	10 W
Frequency range	200-15,000 Hz
SPL	98 dB/W/m
Beam angle	H: 100°/V: 100°
Dimensions	120 x 120 x 120 mm mounting cutout: Ø 101 mm
Weight	0.48 kg

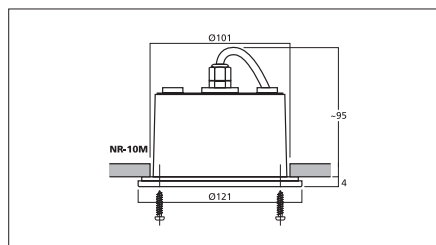

ITH-300

Order No. 0163360

Pole mount set, for PA horn speakers or cameras.

- Suitable for mounting, e.g. IT-130, IT-300TW, IT-40, IT-400TW
- Load capacity: 100 kg (when installed by an expert)
- For pole diameter: up to Ø 300 mm
- Mounting plate and mounting accessories made of V2A steel

Supplied w/o speakers.

Special tools are required for installation. Further information can be obtained from the sales department at MONACOR.

For installation by experts only, as otherwise persons and units will be put at risk.

