

Speakers

Flush-mount Speakers

EDL-6



Order No. 1000263



PA ceiling speaker

- 100 V transmission technology
- 15 cm (6") full range speaker
- Plastic housing with metal grille
- Power taps: 8 W
- Quick-mounting facility with spring clips
- Connection via screw terminal
- For a ceiling thickness from 5 to 25 mm

Model	EDL-6
Frequency range	90-18,000 Hz
Power rating (RMS)	8 W
SPL	90 dB/W/m
Max. rated SPL	99 dB
Radiation angle	H: 90°/V: 90°
Voice coil diameter	Ø 20 mm
Mounting cutout	Ø 170 mm
Dimensions	Ø 193 mm x 72 mm
Colour	white
Weight	476 g

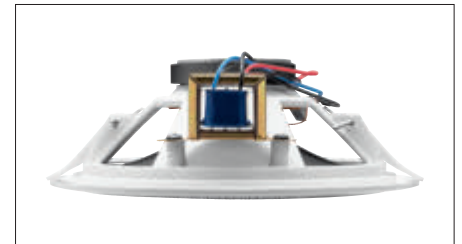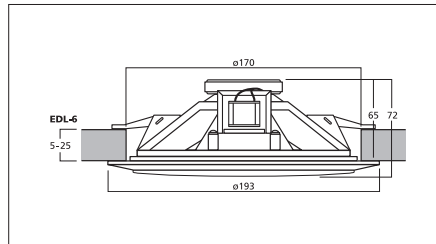

EDL-36TW


Order No. 0162070



PA ceiling speaker

- 100 V transmission technology
- Additional integrated tweeter
- Fire protection cover
- Metal housing with fitted ceramic terminal
- Thermal fuse: 1 A/150 °C
- 3-step power selector switch
- Glass fibre insulated supply line with high-strength cable gland
- Quick-mounting facility
- For a ceiling thickness from 2 to 40 mm

Model	EDL-36TW
Frequency range	150-20,000 Hz
Power rating (RMS)	10/5/2.5 W
SPL	95 dB/W/m
Mounting cutout	Ø 190 mm
Dimensions	Ø 200 mm x 100 mm
Colour	white
Weight	1.45 kg

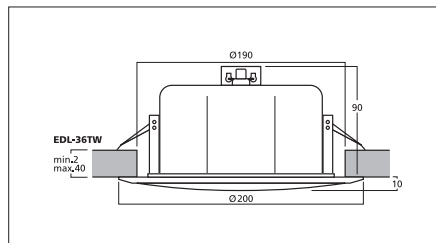

**Professional
PA solutions
for your project**



MONACOR

Your Project is Our Project

www.monacor.com/audio-solution-guide