

EDL-158

Order No. 0162930



EDL-156

Order No. 0161910




EDL-155

Order No. 0162920



Weatherproof PA ceiling speakers, heat-resistant up to 100 °C. For applications in saunas and swimming pool areas.

- 100 V transmission technology
- 2-way system with dome tweeter
- Excellent sound
- White plastic housing
- Weatherproof speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- For a ceiling thickness from 2 to 25 mm

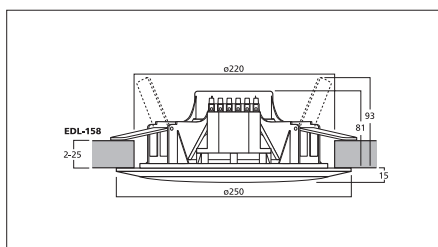

Model	EDL-158	EDL-156	EDL-155
Frequency range	50-16,000 Hz	60-20,000 Hz	70-18,000 Hz
Power rating (RMS)	15/10/5/2.5/1.25 W	15/10/5/2.5/1.25 W	15/10/5/2.5/1.25 W
SPL	89 dB/W/m	88 dB/W/m	87 dB/W/m
Mounting cutout	Ø 220 mm	Ø 190 mm	Ø 170 mm
Dimensions	Ø 250 mm x 96 mm	Ø 226 mm x 100 mm	Ø 202 mm x 100 mm
Colour	white	white	white
Weight	1.12 kg	1.1 kg	1.05 kg


EDL-65TW

Order No. 0162220



Movable PA ceiling speaker

- 100 V transmission technology
- High power rating with 30 W max.
- High-quality 2-way coaxial speaker system with 2-way crossover network
- Complete speaker part can be moved for optimising the sound radiation pattern indoors
- Plastic housing of superior design with metal grille
- Plastic material of ABS and self-extinguishing according to UL 94V-0
- For a ceiling thickness from 9 to 35 mm

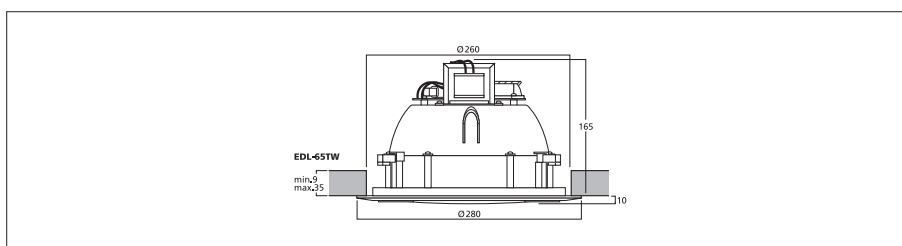

Model	EDL-65TW
Frequency range	50-20,000 Hz
Power rating (RMS)	30/15/7.5 W
SPL	91 dB/W/m
Mounting cutout	Ø 260 mm
Dimensions	Ø 280 mm x 175 mm
Colour	white
Weight	2.38 kg