

Speakers

Wall and Ceiling Speakers

SPE-284/WS

Order No. 0105520



SPE-264/WS

Order No. 0104900




Pair of weatherproof PA ceiling speakers, heat-resistant up to 100 °C.

For applications in saunas and swimming pool areas.

- 2-way system with dome tweeter
- Excellent sound
- White plastic housing
- Weatherproof speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- For a ceiling thickness from 2 to 25 mm
- Spring-loaded speaker terminal



Model	SPE-284/WS	SPE-264/WS
Frequency range	45-20,000 Hz	60-20,000 Hz
Power rating (RMS)	50 W	45 W
Peak music power output (MAX)	100 W	90 W
SPL	89 dB/W/m	88 dB/W/m
Mounting cutout	Ø 220 mm	Ø 190 mm
Dimensions	Ø 250 mm x 96 mm	Ø 226 mm x 100 mm
Colour	white	white
Weight	0.95 kg	0.9 kg

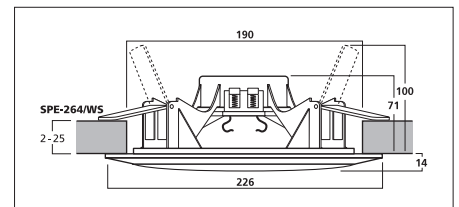

SPE-72/WS


Order No. 0162310



Weatherproof flush-mount full range speaker with dual cone, 20 W, 4 Ω

- Weatherproof speaker of compact size and a high power capability with a wide bandwidth and particularly brilliant reproduction due to a twin cone
- High-quality one-piece white plastic basket with magnetic sleeve
- Polypropylene cone and mica dual cone
- Rubber surround, supplied with matching plastic grille (to be glued in)
- Also suitable for PA applications in a humid environment and outdoors

Model	SPE-72/WS
Frequency range	100-20,000 Hz
Resonant frequency (fs)	100 Hz
Power rating (RMS)	20 W
Peak music power output (MAX)	40 W
SPL	86 dB/W/m
Mounting cutout	Ø 73 mm
Dimensions	Ø 90 mm x 50 mm
Colour	black/silver/white
Weight	230 g

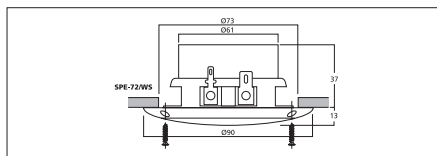

SPE-70/WS

Order No. 0162300



Weatherproof flush-mount full range speaker and bass-midrange speaker, 20 W, 8 Ω

- Weatherproof speaker of compact size and high power capability with a wide bandwidth reproduction
- High-quality one-piece white plastic basket with magnetic sleeve
- Polypropylene cone, rubber surround, supplied with matching plastic grille (to be glued in)
- Also suitable for PA applications in a humid environment and outdoors
- As a bass-midrange speaker also suitable in small hi-fi systems

Model	SPE-70/WS
Frequency range	100-20,000 Hz
Resonant frequency (fs)	100 Hz
Power rating (RMS)	20 W
Peak music power output (MAX)	40 W
SPL	86 dB/W/m
Mounting cutout	Ø 73 mm
Dimensions	Ø 90 mm x 50 mm
Colour	white/black
Weight	230 g

